

# FMM6/AP-3H

## DATASHEET

**Sensor Partners BV**  
📍 James Wattlaan 15  
5151 DP Drunen  
The Netherlands  
☎ +31 (0)416 - 37 82 39  
✉ [info@sensorpartners.com](mailto:info@sensorpartners.com)  
🌐 [sensorpartners.com](http://sensorpartners.com)

**Sensor Partners BVBA**  
📍 Z.1 Researchpark 310  
B-1731, Zellik  
Belgium  
☎ +32 (0)2 - 464 96 90  
✉ [info@sensorpartners.com](mailto:info@sensorpartners.com)  
🌐 [sensorpartners.com](http://sensorpartners.com)

# FMM6/AP-3H

cylindrical full metal inductive



Indicative image



## Detection properties

Nominal sensing distance	3mm
Operanting distance	0...2,43mm
Standard target	12x12mm FE360
Correction Factor	Kupfer: 0 / Aluminium: 0 / Messing: 0,1 / rostfreier Edelstahl: 0,53
Thermal drift of Sr	< 10%
Repeat Accuracy	5% (UB 24V Ta=23°C ±5°C)
Hysteresis	1 ... 20%

## Outputs

Output type	PNP
Output Function	NO
Switching frequency	200Hz

## Electrical data

Operating Voltage	10...30Vdc
No-Load supply current	≤ 10mA
Load current	≤ 200mA
Leakage current	≤ 10μA
Output voltage drop	≤ 1,5V @200mA
Max ripple content	≤10%
LED indicators	Yellow LED output state
Time delay before availability	≤ 50ms
Short-circuit protection	Yes (auto-reset)
Reverse Polarity Protection	Yes
Protection against inductive loads	Yes

## Mechanical data

Mounting	Shielded
Dimensions	M12 x 1 / L = 52mm
Weight	20g
Housing Material	stainless steel AISI316L
Connections	M12 Plug
Active Head Material	stainless steel AISI316L
Tightening torque	10Nm
Operating temperature	-25°C...+70°C
0,25mm	0,50mm
Diameter/Dimension	M12

## Test/Approvals


Approvals	CE cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP68, IP69K
IK05	IK05
80bar	80bar

## Accessories


Supplied Accessories	2 nuts M12x1
----------------------	--------------

---


## Electrical diagrams of the connections

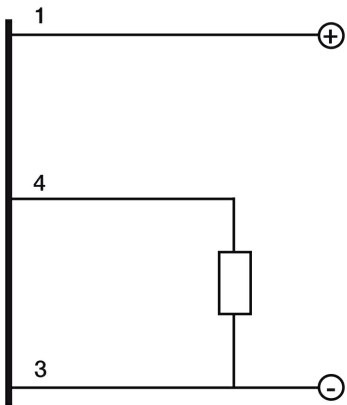

## Connector

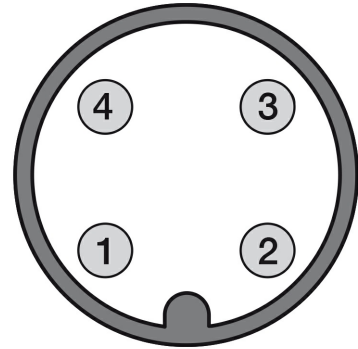

## Installation

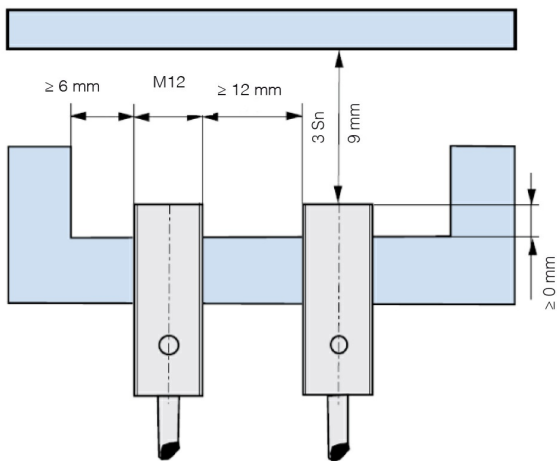

## Response Curves

