


AC - CYLINDRIC / RECTANGULAR TYP: IBCT1848 / AC NO



Configuration:	M18
Fitting:	flush
Sensing Distance Sn (mm):	5,0 mm
Connection:	Cable
Voltage Range:	90 ... 250 VAC
max. Load Current:	200 mA
No-Load Current:	< 5 mA
min. Load Current:	< 20 mA
Voltage Drop:	< 10 V
Switching Frequency:	25 Hz
Hysteresis:	< 15 %
Reproduceability:	0,01 mm
Temperature Drift:	< 10 % v. Sr
Ambient Temperature:	-25 Å°C ... +70 Å°C
Protection Class:	IP 67
Protection Insulated:	yes
Housing Material:	Brass nickel plates
LED:	yes
Connection:	2 m PVC/2 x 0,75 mm2

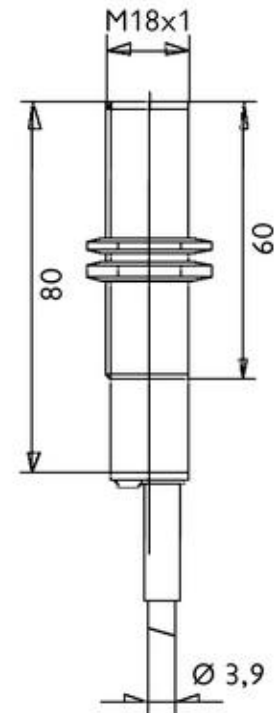

Schönbuch Sensor GmbH & Co KG - Hauffstraße 9 - D-75385 Bad Teinach-Zavelstein
Telefon 07053/92591-00 - Fax 07053/92591-10 - info@schoenbuch-sensor.net